

Revell

KIT 5314

85531400200

P-47N THUNDERBOLT

Affectionately known as the "JUG", the Republic P-47 Thunderbolt was built in greater numbers than any other United States fighter in history. Known for its rugged reliability, the P-47s were often flown home with battle damage that would have brought down almost any other fighter. The P-47N was the last production variant of the very important World War II fighter. Mainly used in the Pacific Theater, its redesign incorporated increased fuel load for longer range, escorting B-29 bombers. Additionally, the "N" version featured distinctive squared-off wing tips for improved roll rate performance. Your Revell model features a detailed pilot, cockpit, radial engine and wheel wells, recessed panel lines, weighted down tires, and underwing stores. Authentic decals for two complete versions are also included.



* REPEAT SEVERAL TIMES * REPEAT PROCEDURE * OPTIONAL PARTS * DECAL * ASSEMBLY CAUTION * CEMENT TOGETHER * REMOVE AND THROW AWAY * DO NOT CEMENT
* A RÉPÉTER PLUSIEURS FOIS * RÊPÊTEZ LE PROCÈDE * PIÈCES EN OPTION * DECAL COMANIE * ATTENTION D ASSEMBLEE * A COLLER * A RETIRER ET JETER * NE PAS COLLER

READ THIS BEFORE YOU BEGIN

- * Study the assembly drawings.
- * Each plastic part is identified by a number.
- * In the assembly drawings, some parts will be marked by a star (★) to indicate chrome plated plastic.
- * For better paint and decal adhesion, wash the plastic parts in a mild detergent solution. Rinse and let air dry.
- * Check the fit of each piece before cementing in place.
- * Use only cement for polystyrene plastic.
- * Scrape plating and paint from areas to be cemented.
- * Allow paint to dry thoroughly before handling parts.
- * Any unused parts may be discarded.

DECAL APPLICATION INSTRUCTIONS

1. Cut desired decal from sheet.
2. Dip decal in water for a few seconds.
3. Place wet decal on paper towel.
4. Wait until decal is movable on paper backing.
5. Place decal in position on model, face up and slide backing away.
6. Press out air bubbles with a soft damp cloth.
7. Milkiness that may appear is for better decal adhesion and will dry clear. Wipe away any excess adhesive.
8. Do not touch decal until fully dry.
9. Allow the decals 48 hours to dry before applying clear coat.

NOTE: Decals are compatible with setting solutions or solvents.

LIRE CE QUI SUIV AVANT DE COMMENCER

- * Etudier les schémas de montage.
- * Chaque pièce en plastique est identifiée par un numéro.
- * Sur les schémas de montage, certaines pièces sont marquées d'une étoile (★) pour indiquer qu'elles sont en plastique chromé.
- * Pour une meilleure prise de la peinture et des autocollants, laver les pièces en plastique avec une solution détergente peu concentrée. Les rincer et les laisser sécher à l'air.
- * Vérifier que chaque pièce s'ajuste bien avant de la coller en place.
- * N'utiliser que de la colle pour polystyrène.
- * Gratter les parties à coller pour enlever le chrome et la peinture.
- * Laisser la peinture bien sécher avant de manipuler les pièces.
- * Toute pièce inutilisée peut être jetée.

DIRECTIVES D'APPLICATION DES AUTOCOLLANTS

1. Découper l'autocollant désiré de la feuille.
2. Tremper l'autocollant dans de l'eau pendant quelques secondes.
3. Placer l'autocollant mouillé sur une serviette en papier.
4. Attendez que l'autocollant puisse être déplacé sur son support en papier.
5. Mettre l'autocollant en position sur le modèle face sur le dessus et faire glisser le support pour l'enlever.
6. Appuyer avec un chiffon doux humide pour éliminer les bulles d'air.
7. La substance laiteuse qui peut apparaître est destinée à améliorer l'adhésion de l'autocollant et devient incolore au séchage. Essuyer pour enlever tout excédent d'adhésif.
8. Ne pas toucher l'autocollant tant qu'il n'est pas bien sec.
9. Laisser l'autocollant sécher pendant 48 heures avant d'appliquer une couche transparente.

REMARQUE: Les autocollants sont compatibles avec les solutions de fixation ou les solvants.

This paint guide is provided to complete this kit as shown on the box.

Ce guide de peintures est fourni pour reproduire le modèle réduit qui apparaît sur la boîte.

Olive Drab	Vert olive
Aluminum	Aluminum
Flat Black	Noir mat
Insignia Red	Marron
Yellow	Jaune
Light Blue	Bleu clair
Chromate Yellow	Jaune chromate

If you have any questions or comments, call our hotline at: (800) 833-3570 or, please write to:

Revell Inc Consumer Service Department, 1850 Howard Street Unit A, Elk Grove Village, Illinois 60007

Be sure to include the plan number (85531400200), part number, description, your return address and phone number.






Visit our website: www.revell.com

Revell Inc Elk Grove Village, IL. Copyright © 2011. All rights reserved.



1

FUSELAGE / COCKPIT ASSEMBLY

PAINT NOTE:
PAINT INTERIOR OF THE FUSELAGE IN THE
COCKPIT AREA DULL DARK GREEN

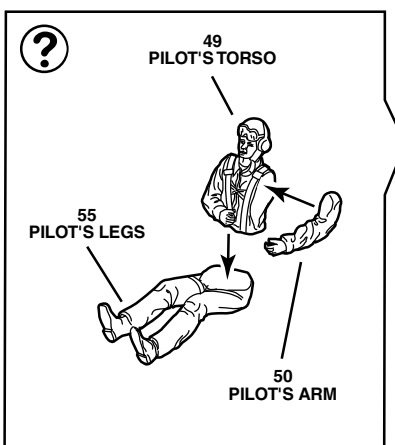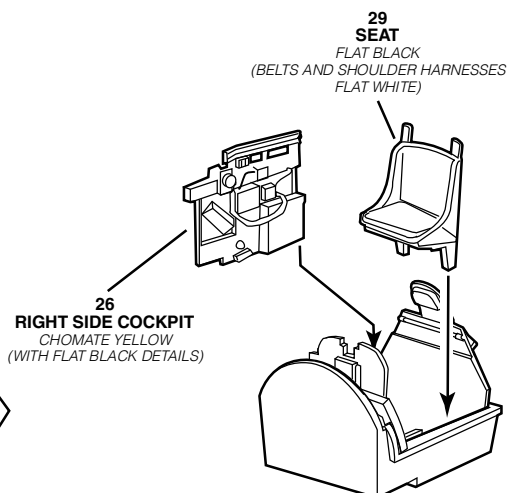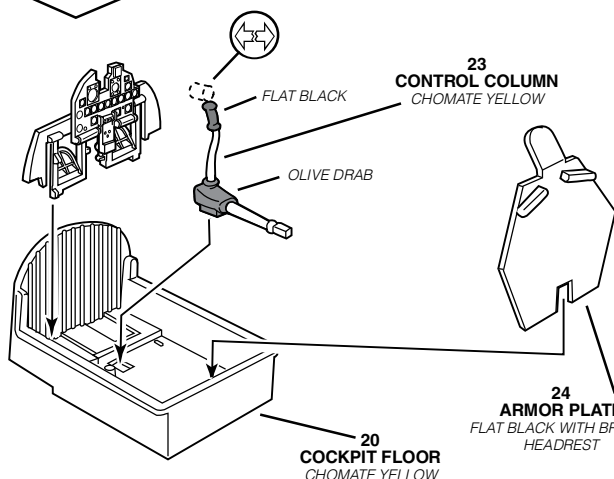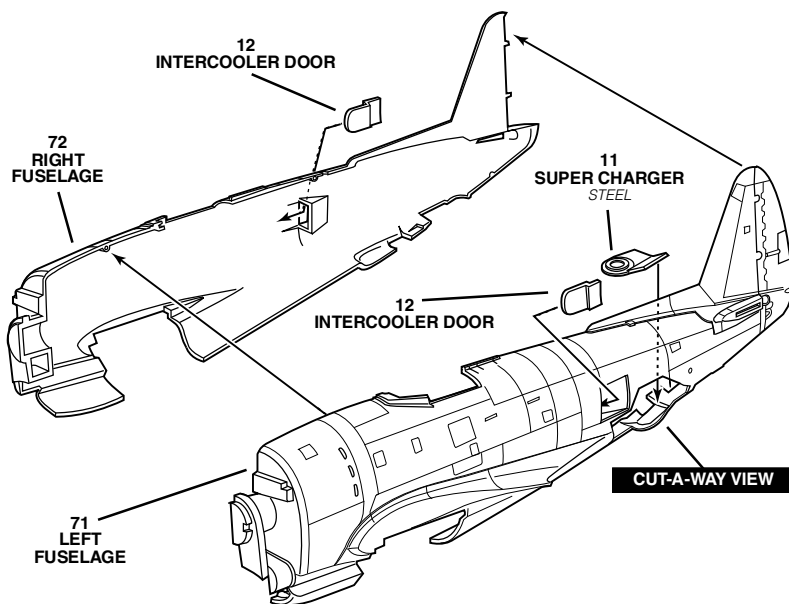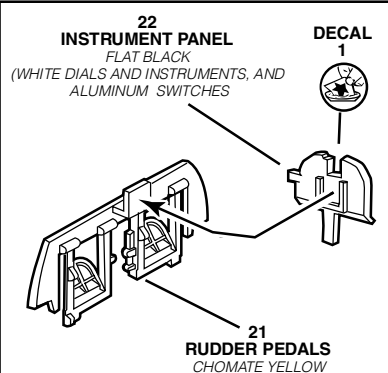


FOR PILOT PAINT NOTE: SEE STEP 14

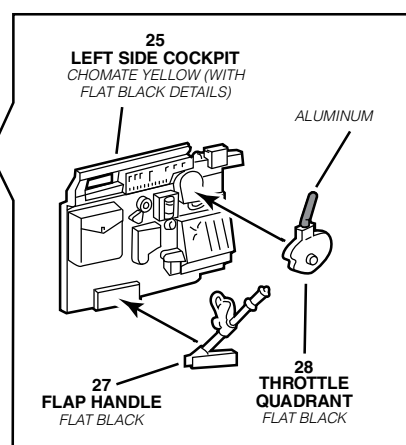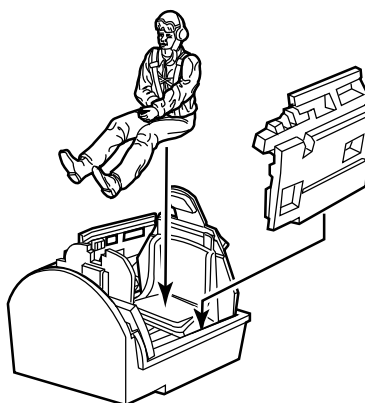


2

COCKPIT / FUSELAGE ASSEMBLY

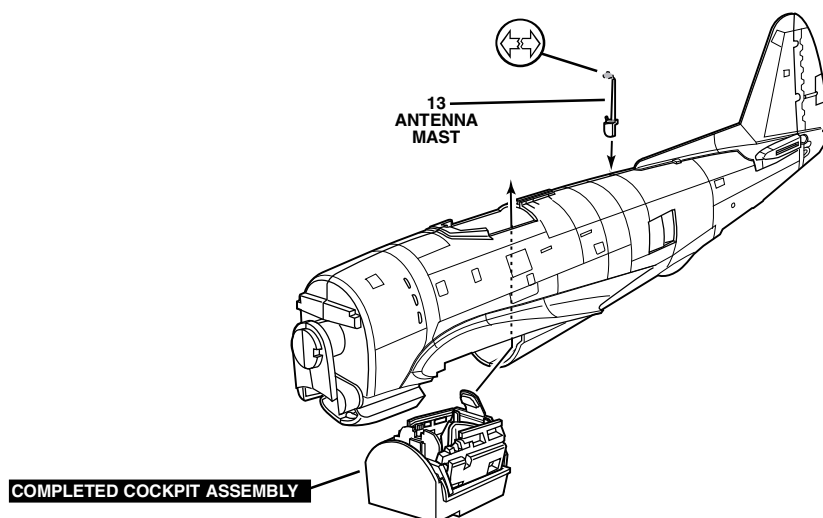


3

WING ASSEMBLY

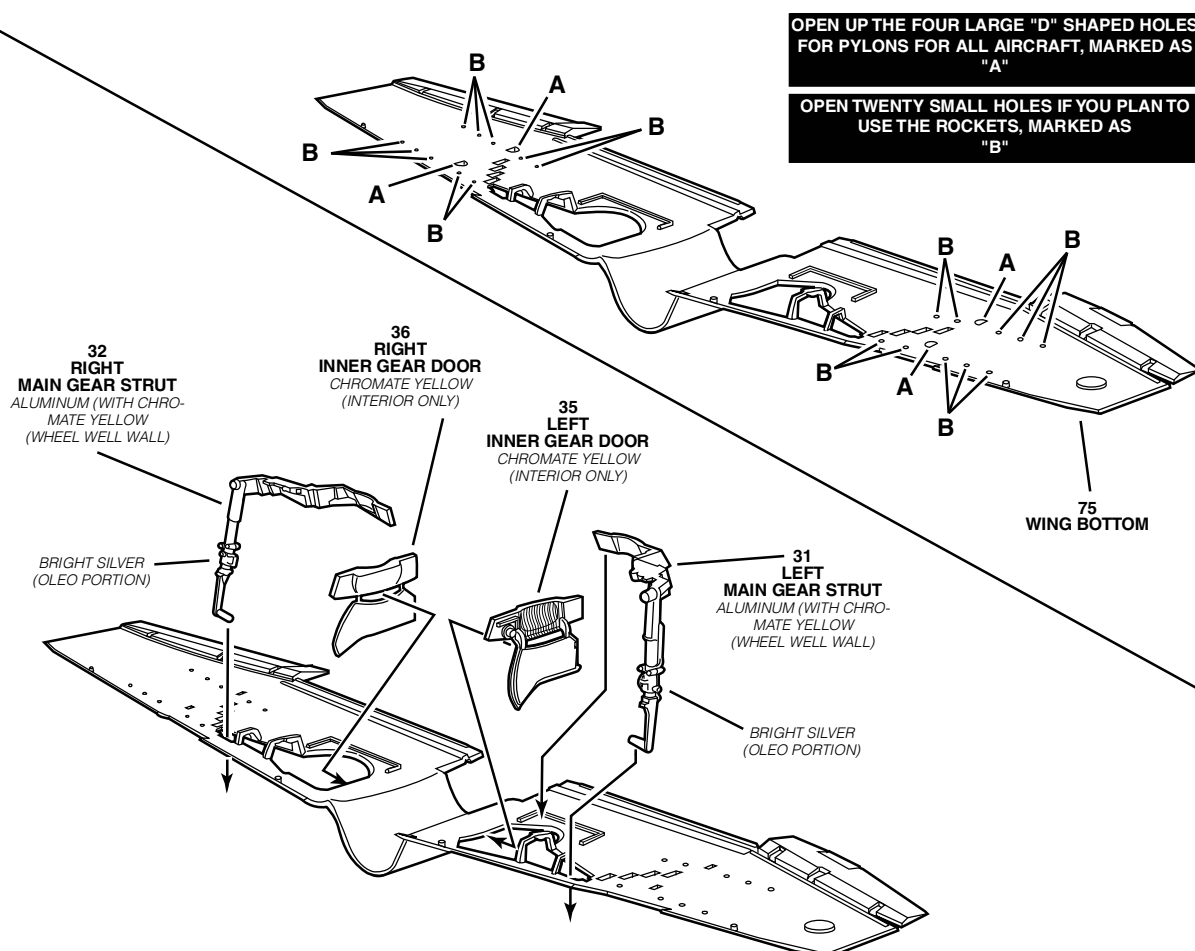


3

WING ASSEMBLY CONTINUED

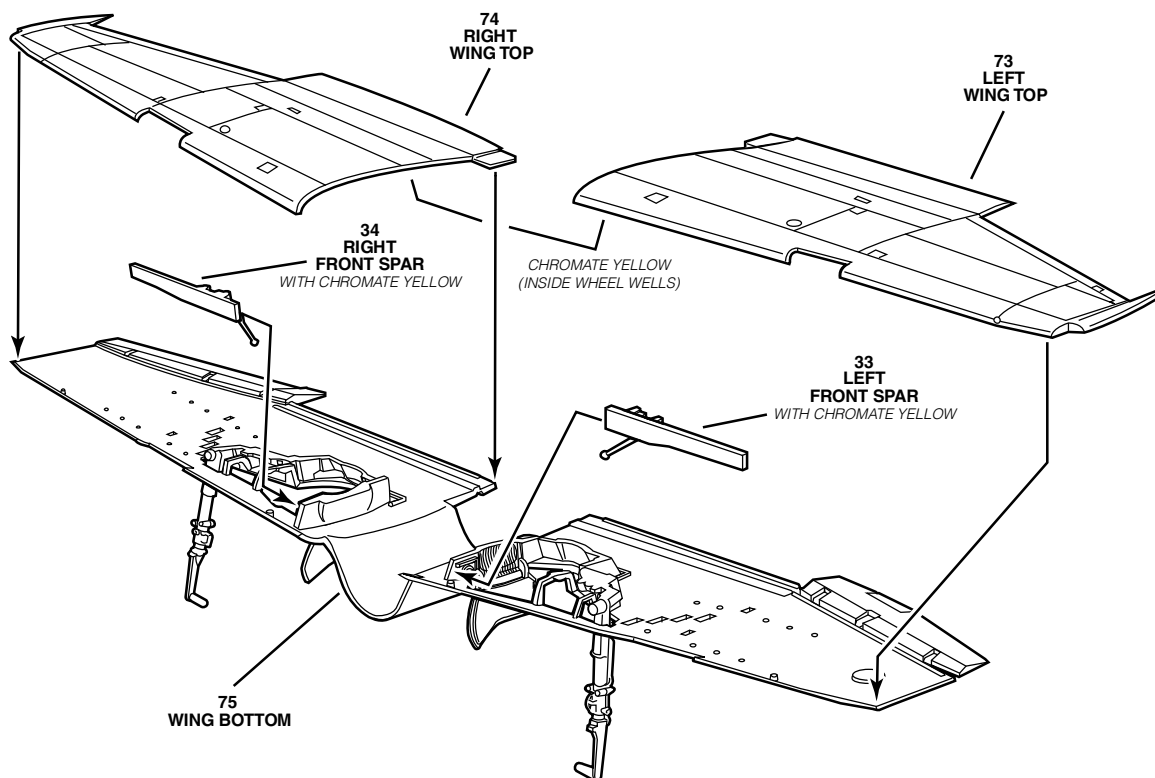


4

GUN ASSEMBLY

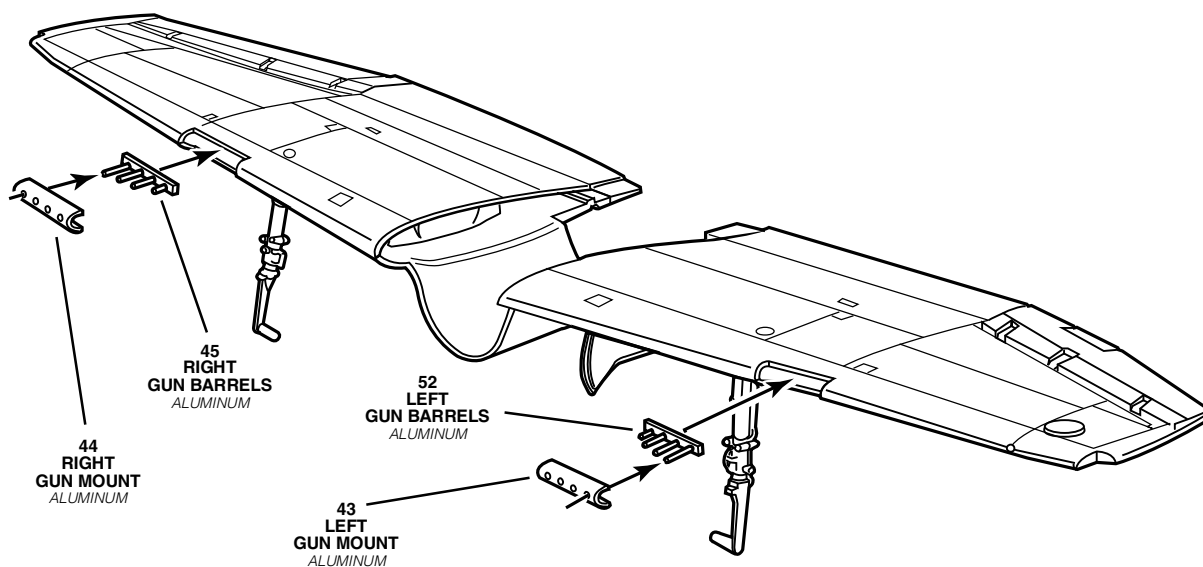



5

WING TO FUSELAGE ASSEMBLY

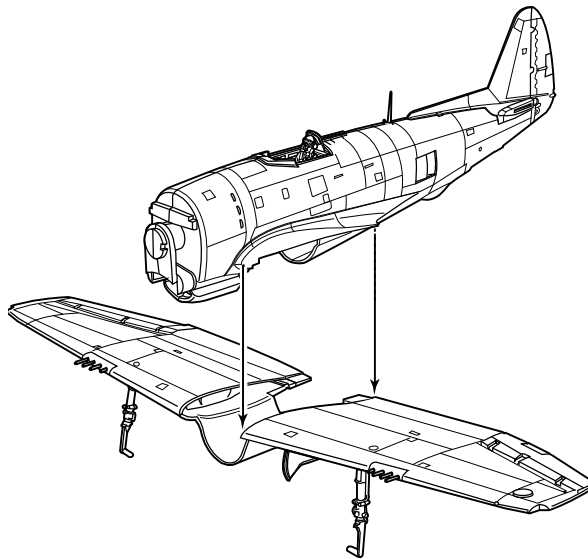

6


STABILIZER ASSEMBLY

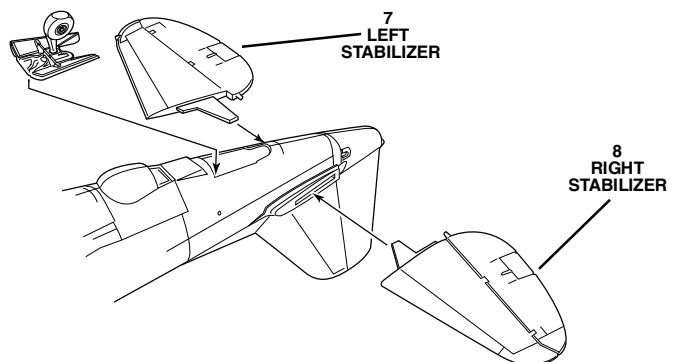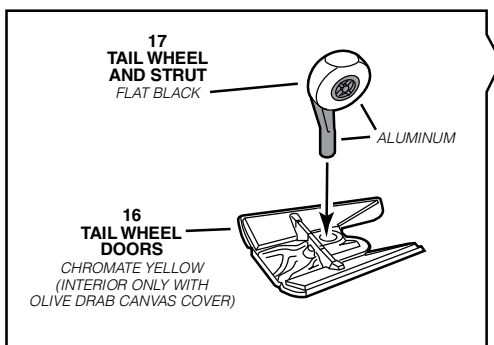

7



ENGINE ASSEMBLY

PAINT NOTE:
CYLINDERS ARE A
STEEL COLOR, WHILE
THE TWO PUSH RODS
ON BACK CYLINDER ARE
BRIGHT SILVER. THE
WIRES ARE DARK GRAY
WITH COPPER COLORED
CONNECTORS

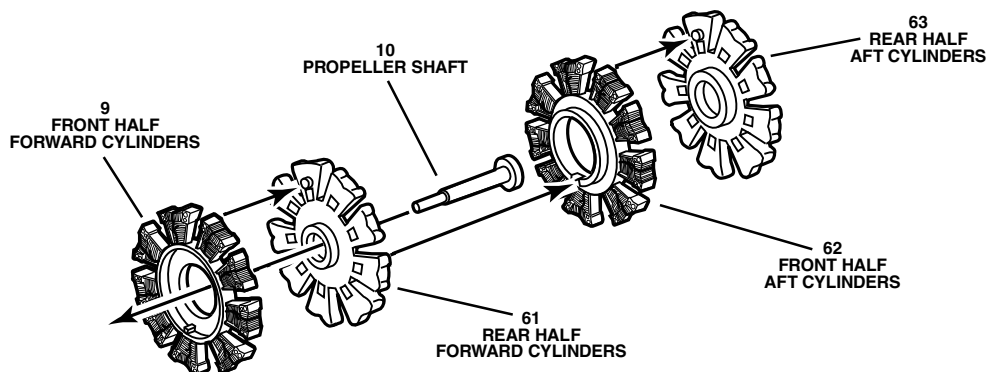



8

ENGINE TO FUSELAGE ASSEMBLY

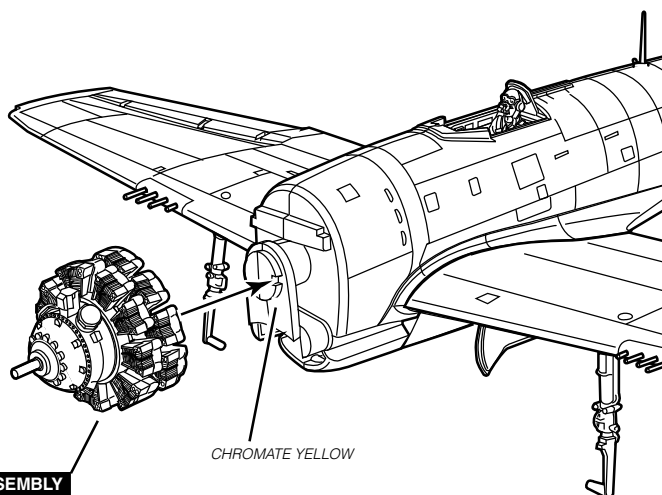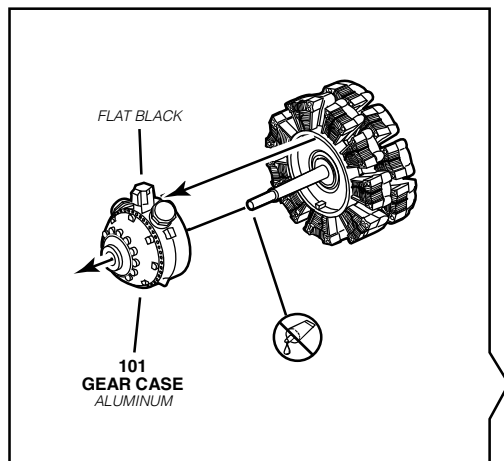


9

COWLING ASSEMBLY

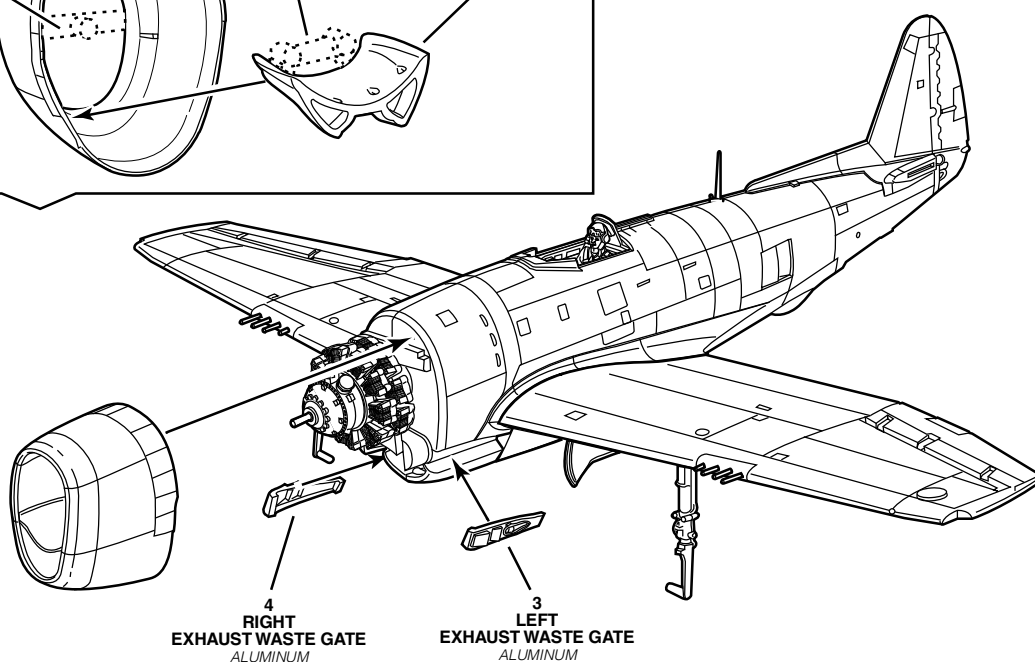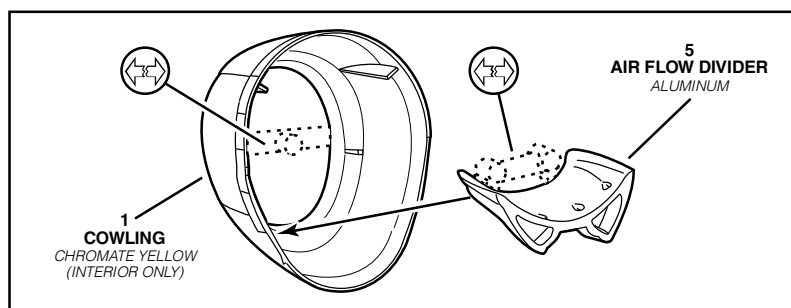


10

WHEEL / DOOR ASSEMBLY

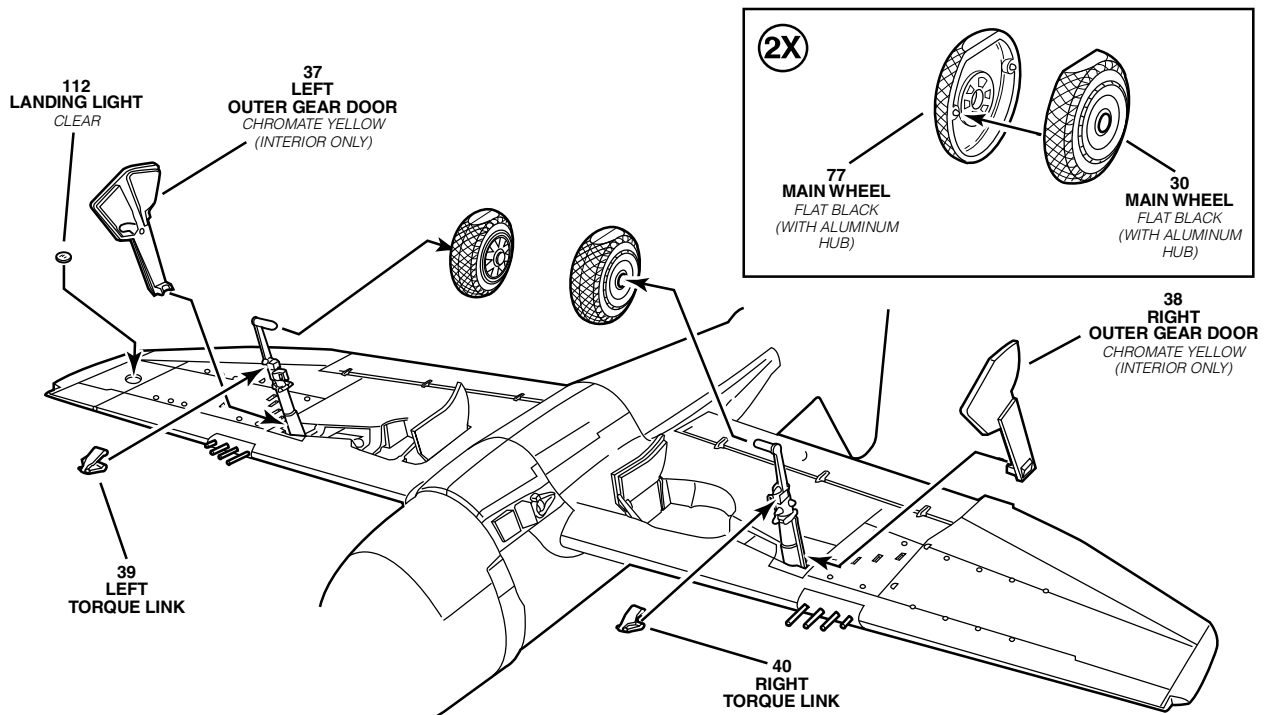

11

ROCKET ASSEMBLY

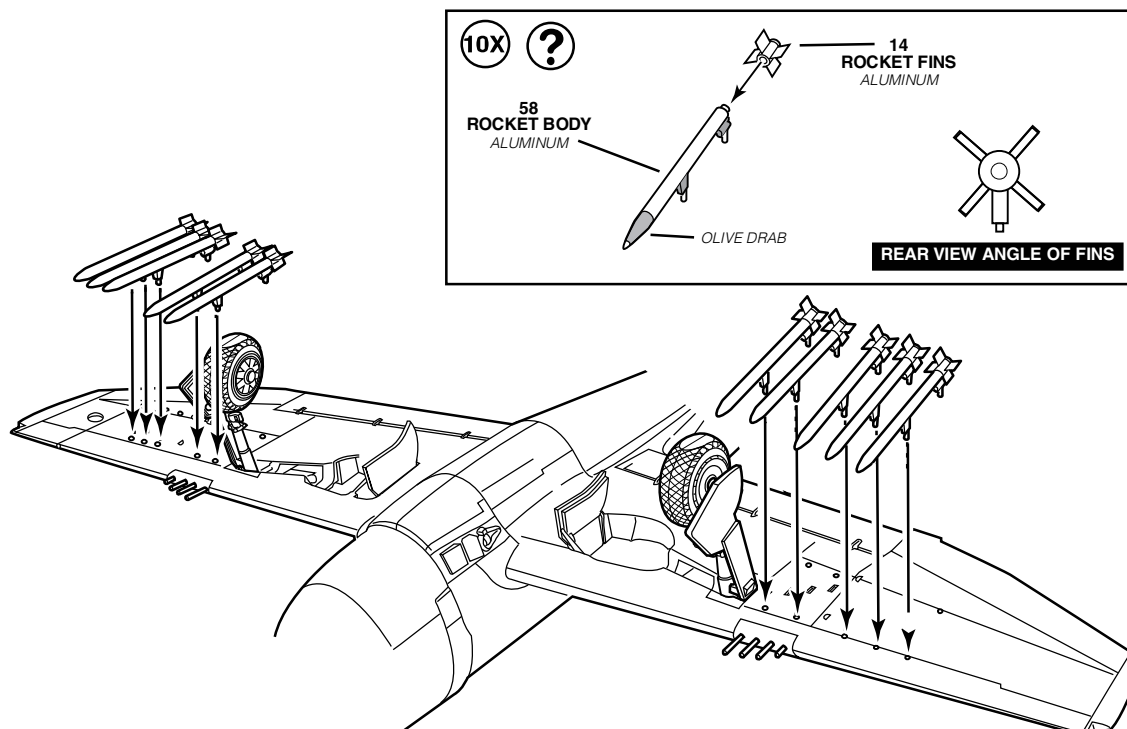


12

FUEL TANK / BOMB ASSEMBLY


(2X) !

159
FUEL TANK
LEFT HALF
ALUMINUM



160
FUEL TANK
RIGHT HALF
ALUMINUM

41
RIGHT PYLON
OUTER HALF




42
RIGHT PYLON
INNER HALF

ROCKETS NOT SHOWN FOR CLAIRTY

19
SWAY BRACE
ALUMINUM

18
AFT BRACE
ALUMINUM

57
LEFT PYLON
OUTER HALF




56
LEFT PYLON
INNER HALF

19
SWAY BRACE
ALUMINUM

18
AFT BRACE
ALUMINUM



(2X) !

47
LEFT
BOMB HALF
OLIVE DRAB




48
RIGHT
BOMB HALF
OLIVE DRAB

46
BOMB FINS
OLIVE DRAB




19
SWAY BRACE
ALUMINUM

COMPLETED PYLON

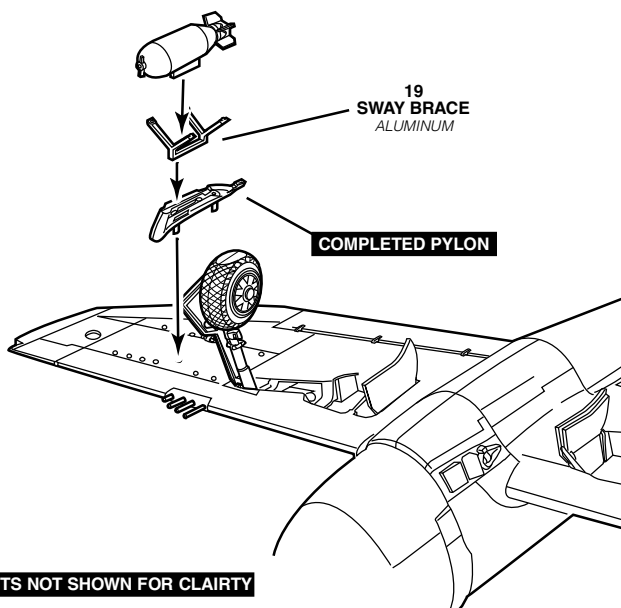

19
SWAY BRACE
ALUMINUM


COMPLETED PYLON



ROCKETS NOT SHOWN FOR CLAIRTY





13

PROPELLER ASSEMBLY

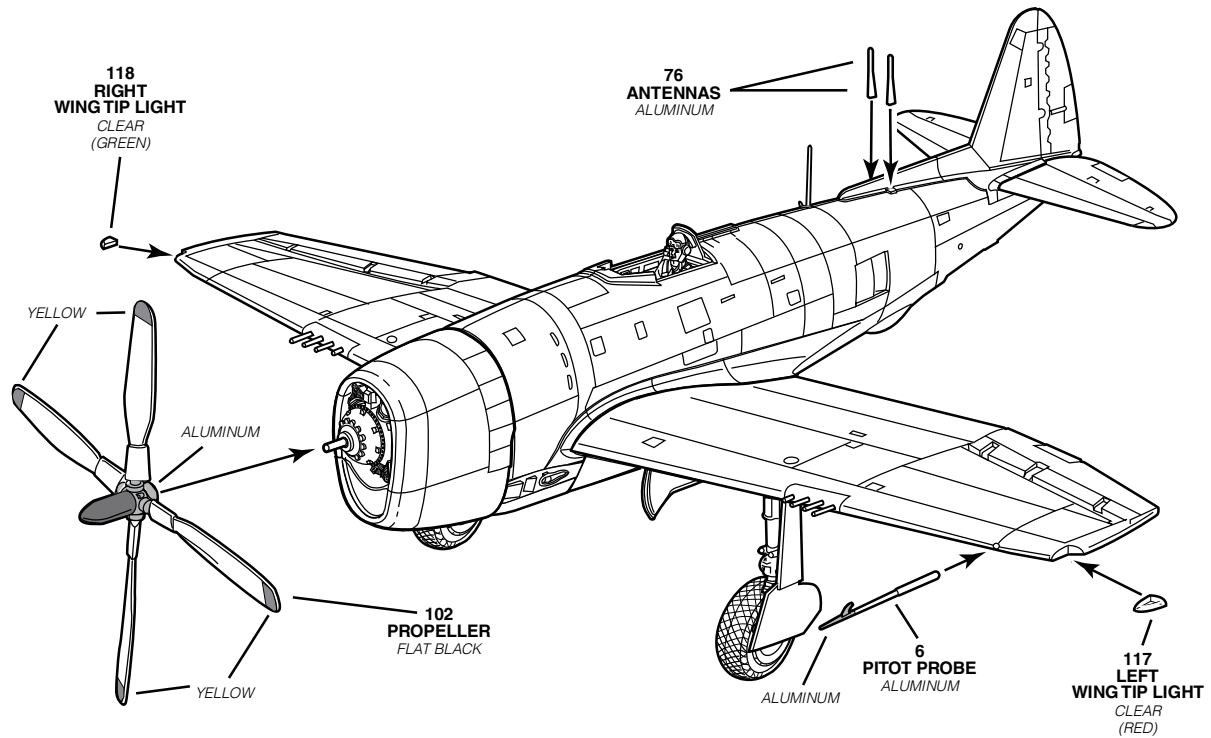

14

CANOPY ASSEMBLY

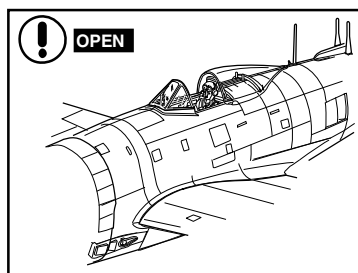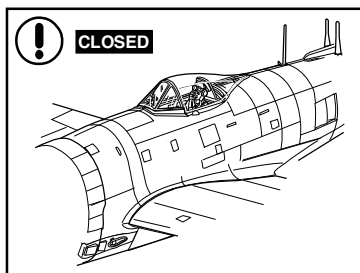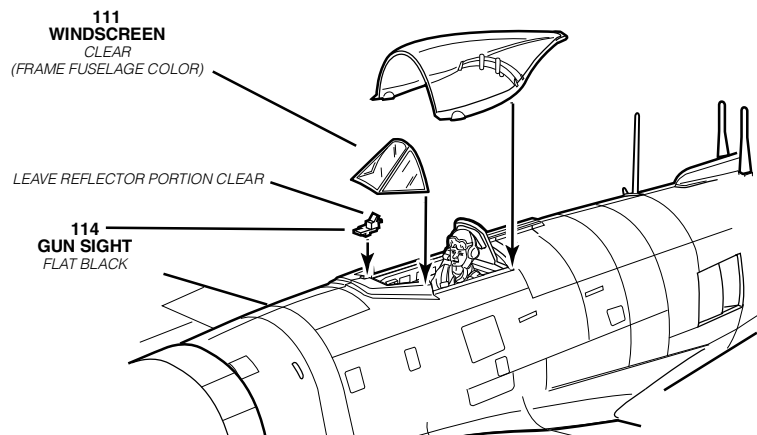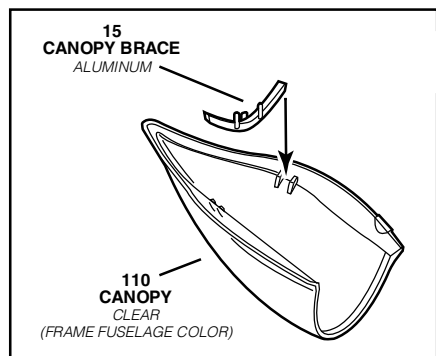


PAINT NOTE FOR PILOT:
UNIFORMS - KHAKI, LIFE VEST - YELLOW,
HARNES AND SEAT BELT - DIRTY WHITE WITH
SILVER BUCKLES. FLIGHT JACKET - DARK
BROWN OR BLACK LEATHER, HEADPHONES
AND GLOVES - BROWN OR BLACK, GOGGLES
- BROWN, KHAKI OR GRAY

15

DECAL PLACEMENT


LI'L MEATIE'S MEAT CHOPPER P-47N-2-RE, PILOT LT. OSCAR PERDOMO, 464TH FS. 507TH FG. ON AUGUST 13, 1944, LT. PERDOMO BECAME WW II'S LAST "ACE IN A DAY", DOWNING FIVE AIRCRAFT OVER SEOUL, KOREA.

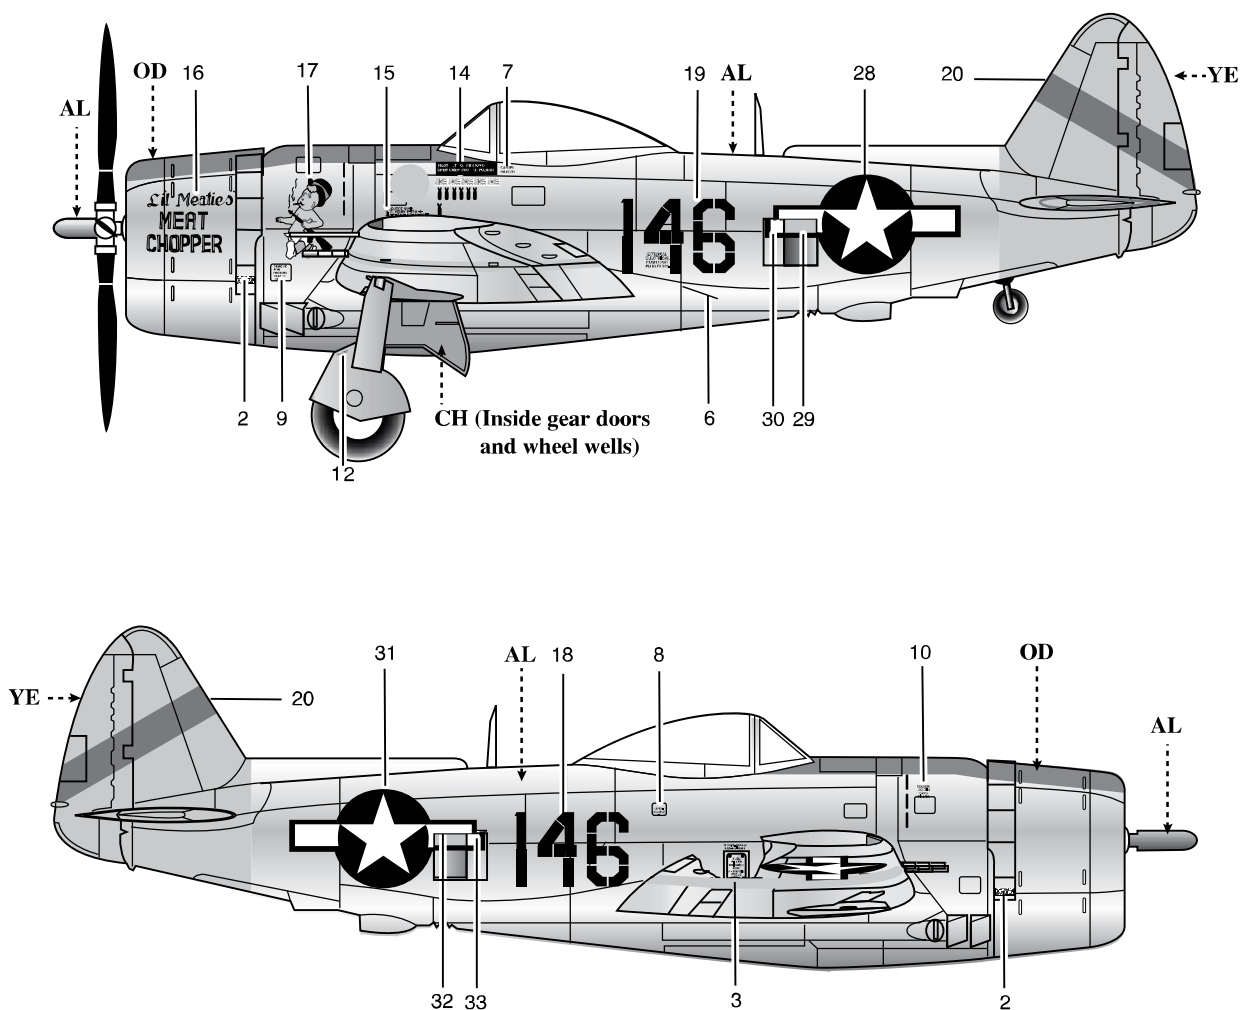

PAINT COLORS

IR		Insignia Red FS 11136	YE		Yellow, FS 13507	OD		Olive Drab, FS 34088
CH		Chromate Yellow Primer FS 33481	AL		Aluminum			
LB		Light Blue, FS 15180 Testor 1110	FB		Flat Black			

**F-47N-25-RE, PILOT LT. COL. OLLIE O. SIMPSON, COMMANDER, 128TH FS
116TH W, GEORGIA AIR NATIONAL GUARD, MARIETTA AIR BASE, 1947/1950**

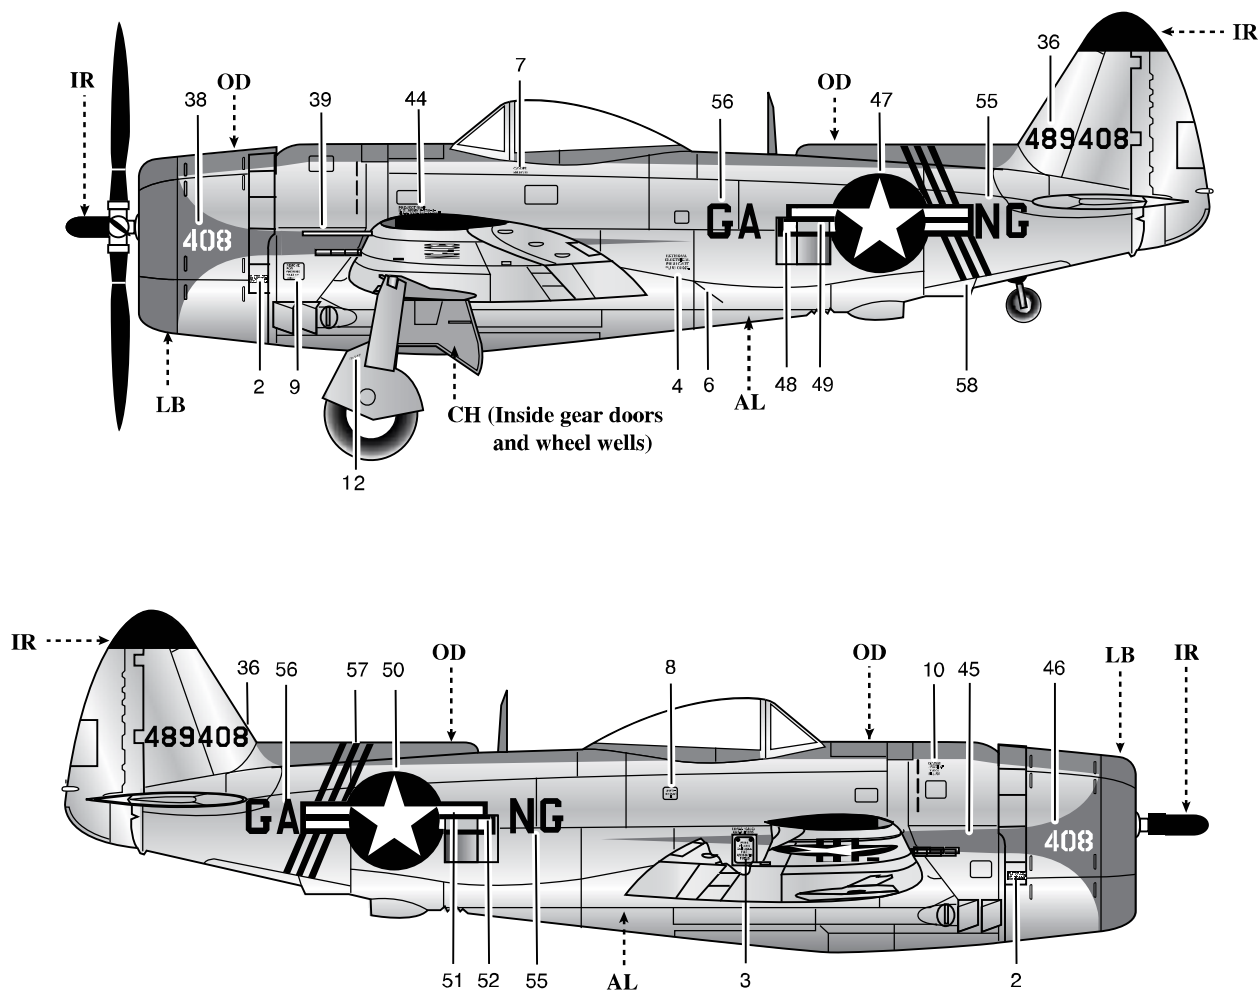

PAINT COLORS

IR	 Insignia Red FS 11136	YE	 Yellow, FS 13507	OD	 Olive Drab, FS 34088
CH	 Chromate Yellow Primer FS 33481	AL	 Aluminum		
LB	 Light Blue, FS 15180 Testor 1110	FB	 Flat Black		

TOP VIEW

YE

13

35

34

YE

11

11

OD

11

21

Apply over insignia

BOTTOM VIEW

YE

Apply over insignia

Propeller

26

The image contains two technical diagrams of a Douglas C-47A-1 aircraft, showing the top and bottom views. The aircraft is marked with the serial number NG 408 and features a white star insignia on the wings and tail. Various callouts and numbers are used to identify specific parts and markings:

- TOP VIEW:**
 - Callouts:** AL (Aircraft Label), IR (Identification), OD (Operational Data), LB (Load Bearing), and "Apply over insignia".
 - Numbers:** 23, 22, 25, 24, 37, 35, 34, 54, 11, 55, 11, 37.
- BOTTOM VIEW:**
 - Callouts:** AL (Aircraft Label), IR (Identification), OD (Operational Data), LB (Load Bearing), and "Apply over insignia".
 - Numbers:** 22, 55, 54, 11, 37.

A small inset diagram in the bottom right corner shows a 500lb bomb with the number 42.

IR		Insignia Red FS 11136	YE		Yellow, FS 13507	OD		Olive Drab, FS 34088
CH		Chromate Yellow Primer FS 33481	AL		Aluminum			
LB		Light Blue, FS 15180 Testor 1110	FB		Flat Black			